



NEXT! BACKLIT

Set-up Instructions



Backlit SEG Fabric Pop-Up System

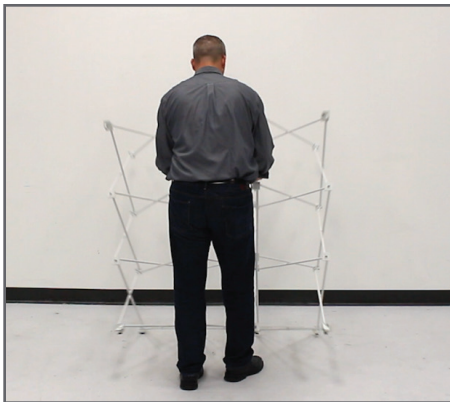





1. Set-up frame

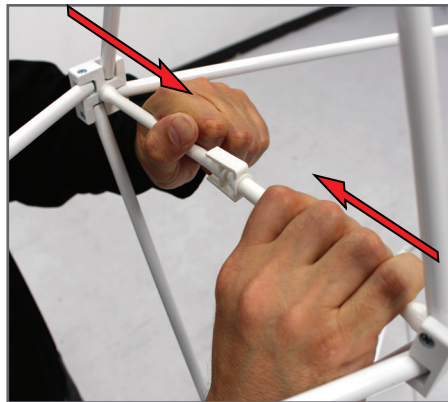

2. Lock the center hubs

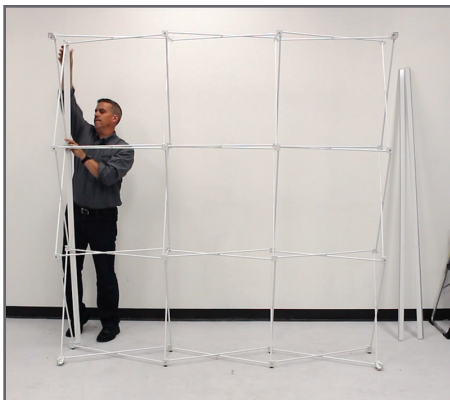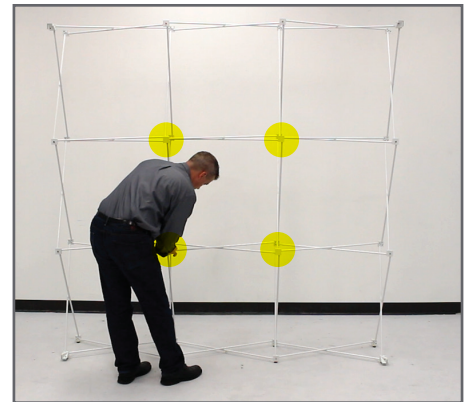


3. Hang channel bars on the perimeter of the frame

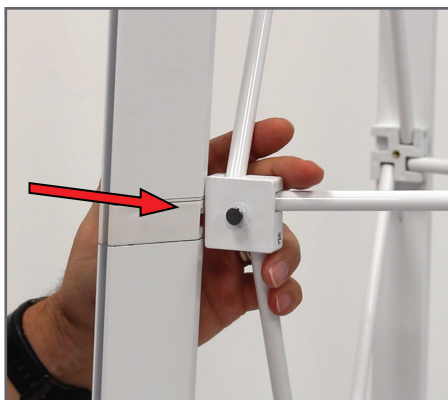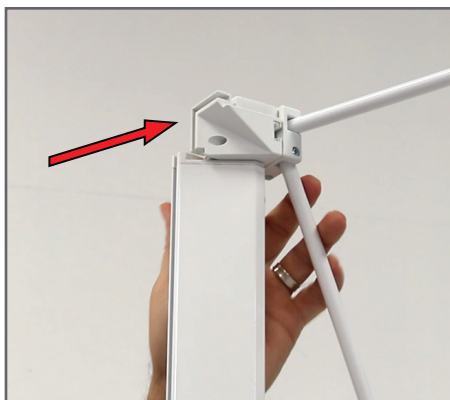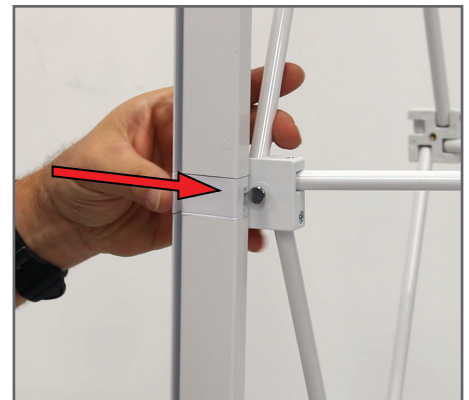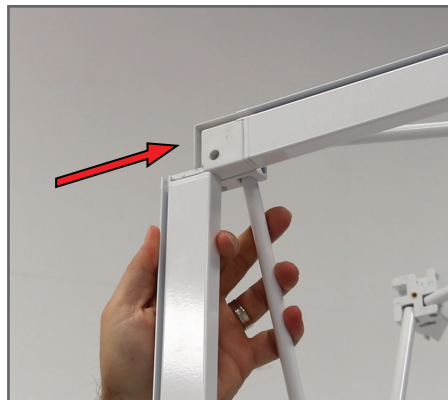

Scan for Set Up Video:


Channel bar removal

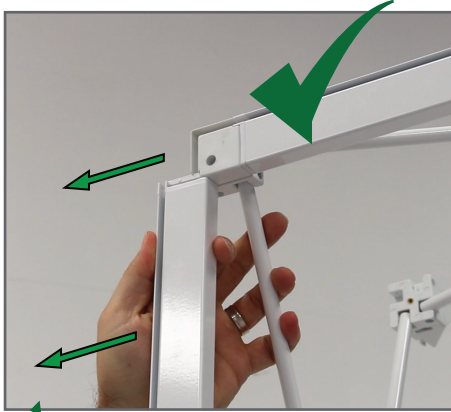


CORRECT



INCORRECT

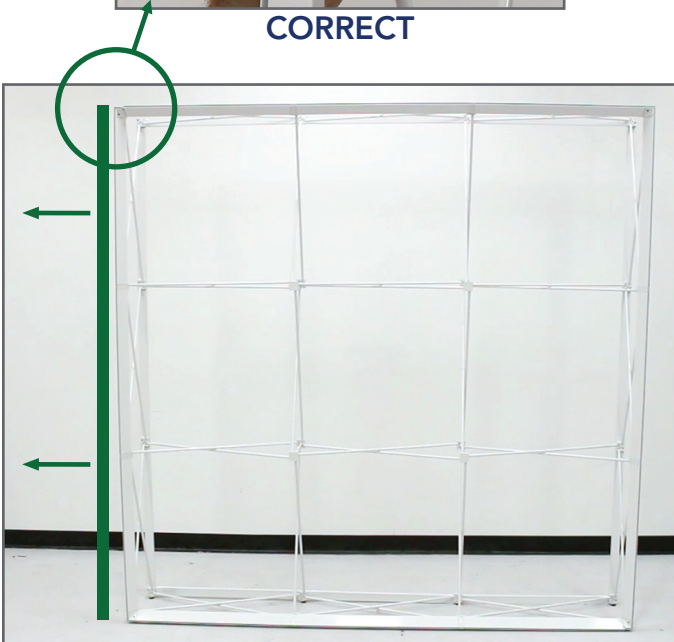


CORRECT

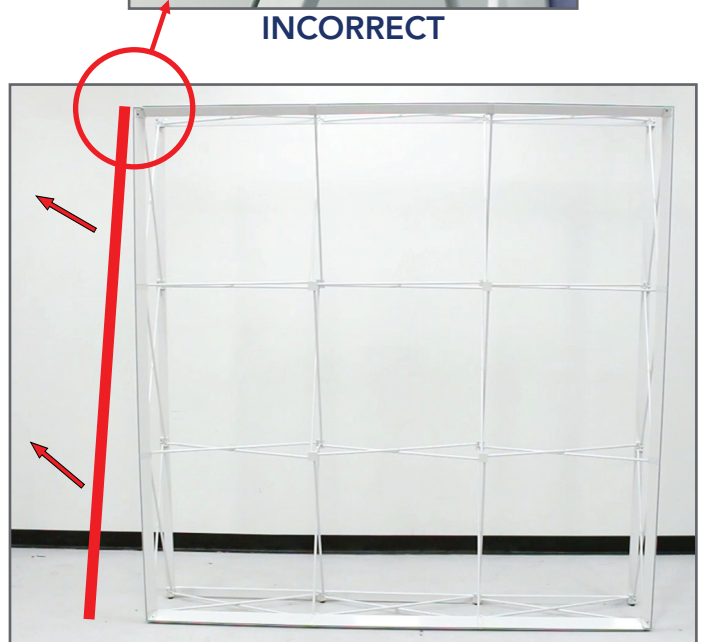


INCORRECT

Remove channel bars evenly
to avoid possible damage


External 90 Degree Connector



Internal 90 Degree Connector



Inline Connector

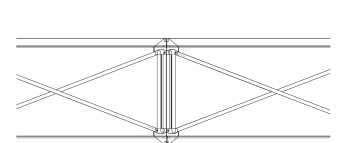

Install front graphic



4. Install front graphic, start with endcaps



5. Move to center of frame then to corners.



Scan for Set Up Video:



NEXT! BACKLIT

Backlit SEG Fabric Pop-Up System

Install lights and back graphic



5. Hang lights (Bulb side facing back of display, not front)

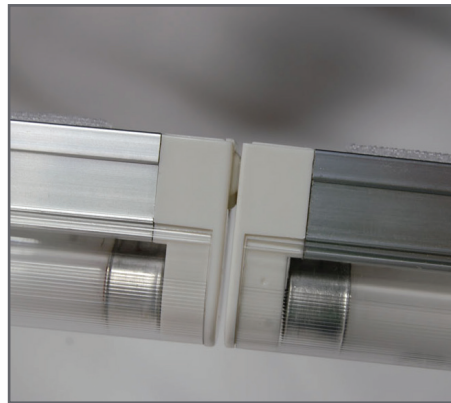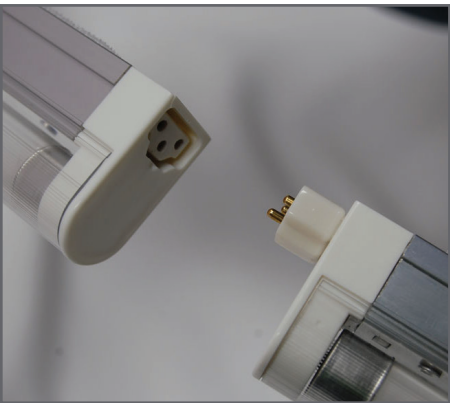

See light kit wiring diagram



6. Install back graphic



7. Finish by plugging in

Radiance Lighting Set-Up

1)



After frame is assembled, position light mounting brackets into place on the bottom frame quad scissors.

Note: the brackets are notched specifically to create a level platform for light placement and may need to be rotated to fit different frame systems.

2)

Place Radiance lights into the mounting brackets and connect the wires and power supply.

Note: certain frame sizes will have multiple power supplies.

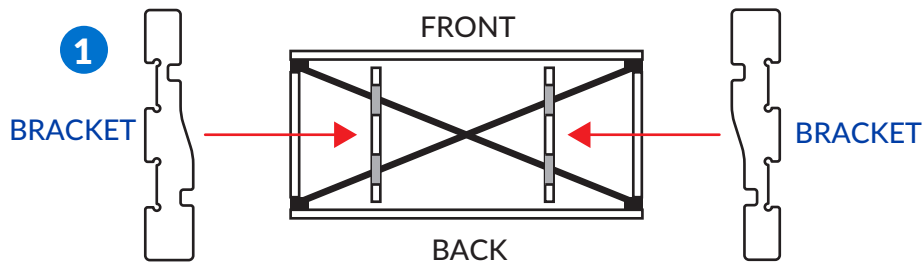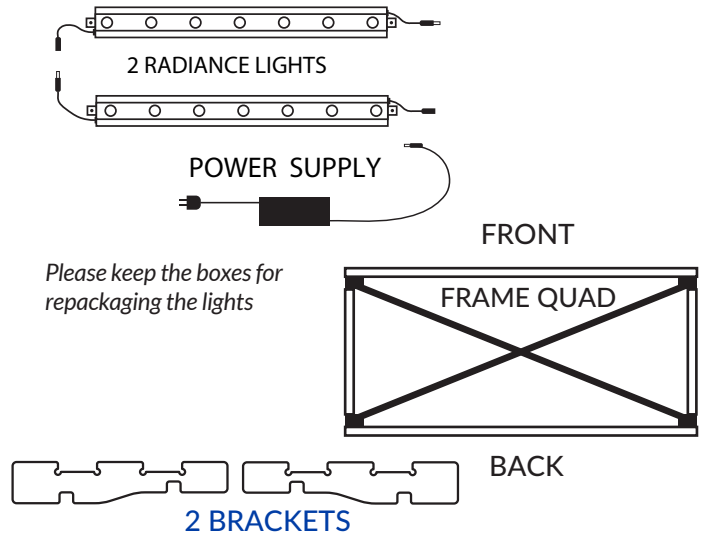

2

